

ECO SF50

Visible Light Facial Recognition Technology
with ADMS Function




VISIT NOW





www.ecotimeprint.com





ECO SF50



Face



Password



Fingerprint



RFID Card
(Optional)


USB
Flash Disk


TCP/IP


Verify with
Mask On


ADMS


POWER BY
ECOTIMEPRINT
ETA2



ECO SF50 come with the latest algorithm and Visible Light facial recognition technologies, the device can recognize a target in the distance from 30cm to 50cm. It will automatically operate when it detects a human face in the detection distance to deliver better recognition quality in terms of speed and accuracy than the previous near-infrared facial recognition terminals. Furthermore, ADMS function is available for the user to download data from different network area.

Terminal Overview




SPECIFICATIONS

Model	ECO SF50
Screen	2.8 inch Color Screen
Communication	TCP/IP, USB Flash Disk
User Template	500 (Fingerprints), 100 (Face), 500 (ID Card)
Records Capacity	50,000
Memory	128MB & SDRAM 32MB
Algorithm version	10.0
Authentication Method	Face/ Fingerprint/ Password/ RFID Card
Identification Time	<1S
Authentication Mode	1:1, 1:N
Door Access Function	Yes (Simple Door Access)
ADMS	Yes
Power	DC5V/2A
Operating Environment	0°C - 45°C, Humidity: 20% - 80%
Dimension(L*W*H)	151.5*168.0*31.7mm

Note: Specifications are subject to change



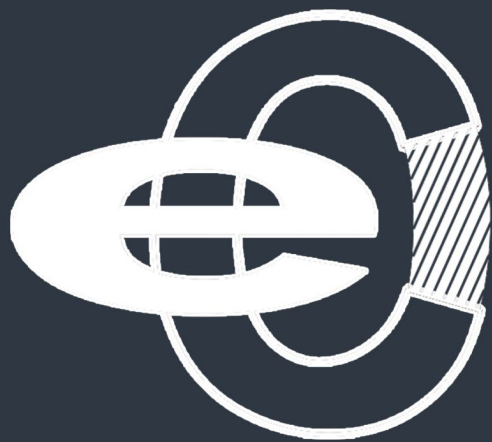

TIMEPRINT

www.ecotimeprint.com