


## ECO200D



ECO200D is an IP based RFID access control devices, which is made with elegant design and professional surface treatment. The device has lock control, alarm, exit button, door sensor. The Wiegand-in interface is used to connect external reader to construct master and slave system. The operation can be done on PC software and upload to the device through TCP/IP, RS232/485 communication.

#### **Terminal Overview**

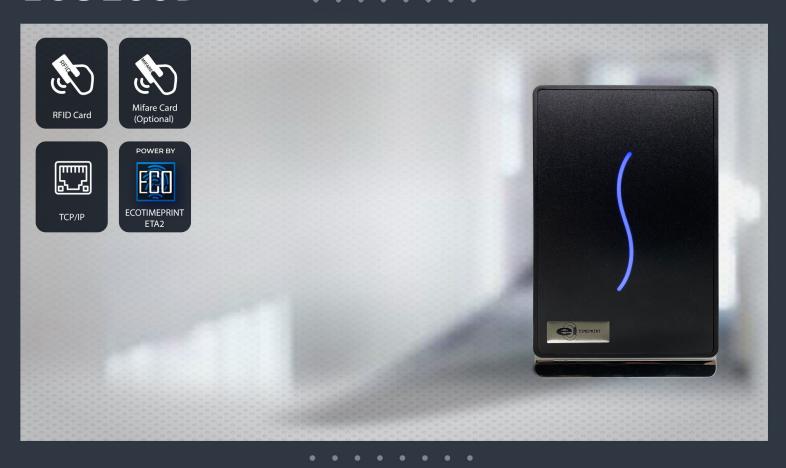

### **SPECIFICATIONS**

Model	ECO200D
Authentication Method	RFID Card / Mifare Card (Optional)
ID Card Capacity	30,000
Logs Capacity	50,000
Communication	TCP/IP, RS232/485, USB Host
Access Control Interface	EM Lock, Siren, Release Button, Doorbell, Door Sensor
Beeper	Yes
LED	Red and Green LEDs
CPU	32 bit 6001 microprocessor 400MHz
Memory	4M RAM, 32M Flash
Power	DC12V/3A
Operating Environment	0°C - 45°C, Humidity: 20% - 80%
Dimension(L*W*H)	153*95.5*35.5mm

Note: Specifications are subject to change


#### ECO200D











# **TIMEPRINT**

www.ecotimeprint.com