

TIMEPRINT™
www.ecotimeprint.com

Discover Face Recognition

EFACE880




EFACE880



The EFACE880 provides a superior touching experience with touch keypad and excellence face recognition. This device can be placed on any flat surface or Table, which make it suitable to be used in almost any business and centre.

Terminal Overview

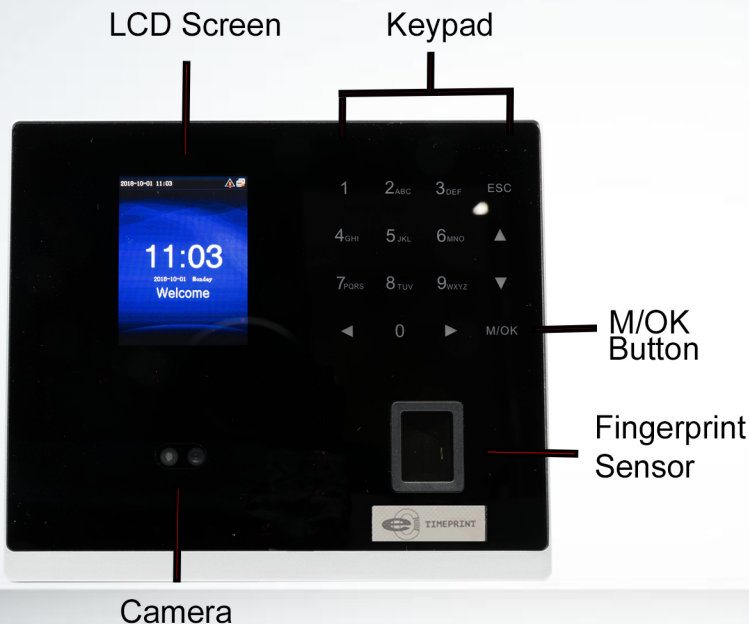

EFACE880 attendance machine that is launched to reduce management costs effectively, provide convenience for employees. Users can download attendance reports for review and statistics. Other type can only do some simple operations such as add and manage user, upload or download user data or attendance data etc.



User

This menu item include **Add user** and **User Mgt.**, which allows you to add, browse, and manage user nformation, including the employee ID, name, fingerprint, password, and Face.



Comm.

This menu item allows you connect this device with PC to access attendance data, you need set IP Address, Subnetmask, Gatway, DHCP and the communication password first.



System

This menu item allows you to set system-related parameters, including the basic parameters, Date/Time, Communication option, Timing State Switching Setting, SMS Setting and so on, to enable the terminal to meet user requirements to the greatest extent in terms of functions and display.



Dn/Upload

This menu item allows you to download attendance data and user data, or upload user data.



Data Mgt.

This menu item allows you to upload or download user data or attendance data, delete attendance data and all user data, and revoke management rights. Through a USB disk, export user information and attendance data from this device to related software or other fingerprint recognition devices.



Record


This menu item allows you to easily query the attendance records saved on the device.



Sys.info.

This menu item allows you to check the storage status as well as version information of the device.

Configuration

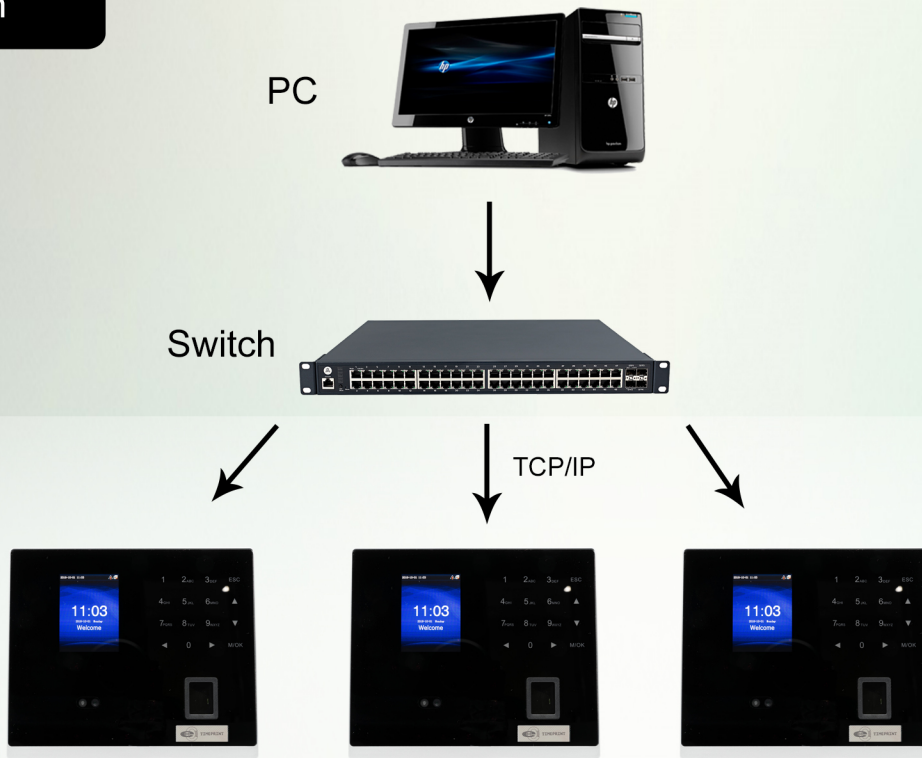

SPECIFICATIONS

Model	EFACE880
LCD Screen	2.8inch TFT Color Screen
Fingerprint Capacity	1,500
Face Capacity	500
User Capacity	1,000
Transaction Capacity	100,000
Communication	RS232/485, TCP/IP, USB-host
Software	ECOTIMEPRINT Software
Identification Time	<1S
Authentication Method	Fingerprint/Password/Face
Power	DC 12V/3A
Operating Environment	0°C - 50°C, Humidity: 20%-80%
Dimension (L×W×H)	180×155×34mm

Note: Specifications are subject to change. Check www.ecotimeprint.com for latest product information.



Powered by



TIMEPRINT
www.ecotimeprint.com

✉ ecosales@ecotimeprint.com

📘 facebook.com/ecotimeprint