

TIMEPRINT™
www.ecotimeprint.com

Designed For Small And Medium Enterprise

ECO TP600




ECO TP600



ECOTP 600 is an innovating fingerprint reader for time and attendance applications, offering unparalleled performance using an advanced algorithm for reliability, precision and excellent matching speed. It is the best choice workshop and medium offices.

Terminal Overview

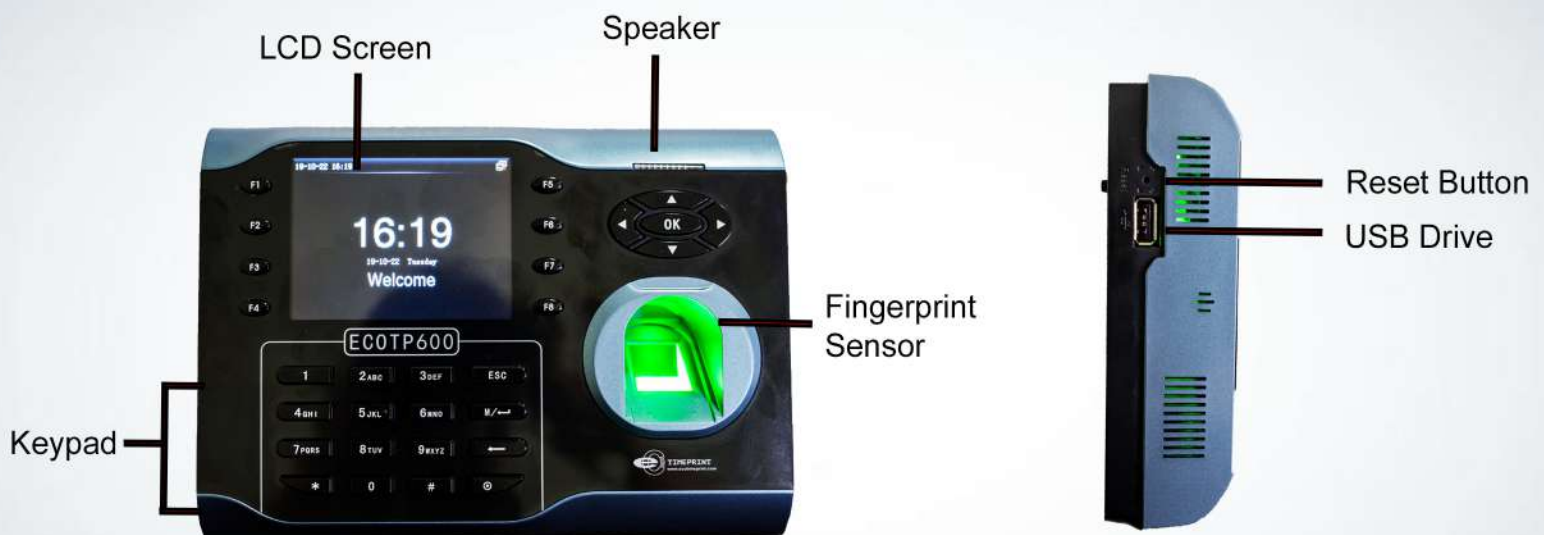

ECOTP600 attendance machine that is launched to reduce management costs effectively, provide convenience for employees. Users can download attendance reports for review and statistics. Other type can only do some simple operations such as add and manage user, upload or download user data or attendance data etc.



User

This menu item include **Add user** and **User Mgt.**, which allows you to add, browse, and manage user nformation, including the employee ID, name, fingerprint, password, and rights.



Comm.

This menu item allows you connect this device with PC to access attendance data, you need set IP Address, Subnetmask, Gatway, DHCP and the communication password first.



System

This menu item allows you to set system-related parameters, including the basic parameters, Date/Time, Communication option, Timing State Switching Setting, SMS Setting and so on, to enable the terminal to meet user requirements to the greatest extent in terms of functions and display.



Dn/Upload

This menu item allows you to download attendance data and user data, or upload user data.



Data Mgt.

This menu item allows you to upload or download user data or attendance data, delete attendance data and all user data, and revoke management rights. Through a USB disk, export user information and attendance data from this device to related software or other fingerprint recognition devices.




Record

This menu item allows you to easily query the attendance records saved on the device.



Sys.info.

This menu item allows you to check the storage status as well as version information of the device.

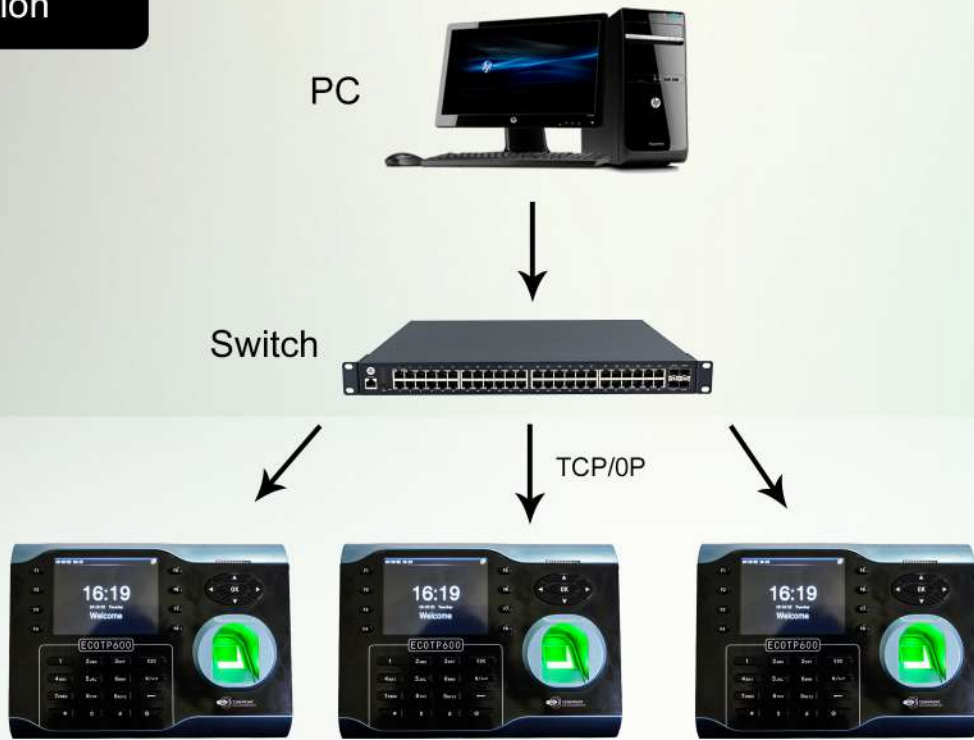

SPECIFICATIONS

| Model | ECOTP600 |
|-----------------------|---|
| LCD Screen | 3.5 inch TFT Color Screen |
| User Capacity | 10,000 |
| Transaction Capacity | 200,000 |
| Communication | RS232/485, TCP/IP, USB-host |
| Software | ECOTIMEPRINT Software |
| Software OS | XP/Win2003/Vista/Win7/Win8/Win10 (32bit / 64 bit) |
| Identification Time | <1S |
| Authentication Method | Fingerprint/Password/RFID Card (Optional) |
| Language | English |
| Power | DC 12V/1.5A |
| Operating Environment | 0°C - 50°C, Humidity: 20%-80% |
| Dimension (L×W×H) | 192×140×41mm |

Note: Specifications are subject to change. Check www.ecotimeprint.com for latest product information.



TIMEPRINT
www.ecotimeprint.com



ecosales@ecotimeprint.com



facebook.com/ecotimeprint

