

VRS200

Professional IP Based RFID Access Control Reader



VISIT NOW



www.ecotimeprint.com




VRS200



VRS200 is an IP based RFID access control devices, which is made with elegant design and professional surface treatment. The device has lock control, alarm, exit button, door sensor. The Wiegand-in interface is used to connect external reader to construct master and slave system. The operation can be done on PC software and upload to the device through TCP/IP, USB Flash Disk communication.

Terminal Overview

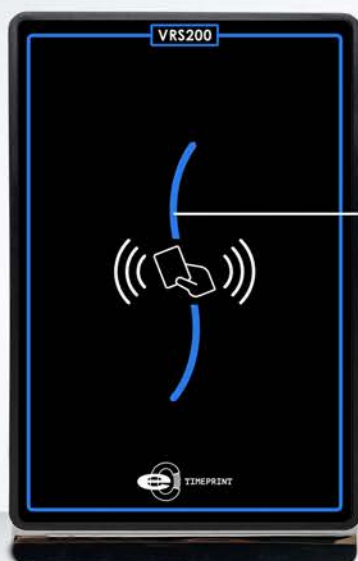

LED Light



USB Port

Reset Button


SPECIFICATIONS

Model	VRS200
Authentication Method	RFID Card / Mifare Card (Optional)
ID Card Capacity	30,000
Logs Capacity	50,000
Communication	TCP/IP, RS232/485, USB Flash Disk
Access Control Interface	EM Lock, Door Sensor, Exit Button, Alarm, Aux. Input
Beeper	Yes
LED	Red and Green LEDs
CPU	32 bit 6001 microprocessor 400MHz
Memory	4M RAM, 32M Flash
Power	DC12V/3A
Operating Environment	0°C - 45°C, Humidity: 20% - 80%
Dimension(L*W*H)	153*95.5*35.5mm

Note: Specifications are subject to change

VRS200



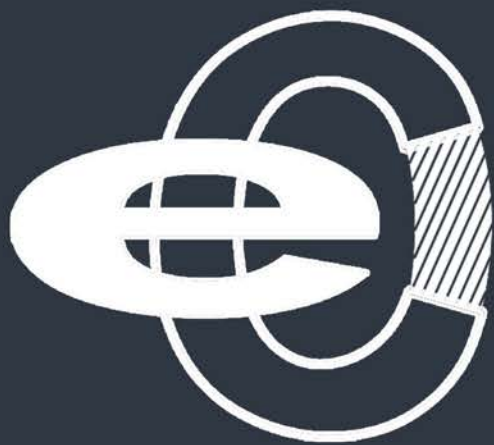

TIMEPRINT

www.ecotimeprint.com